

How to count trees?

Sebastian Piec, Krzysztof Malarz^{*} and Krzysztof Kułakowski

*AGH University of Science and Technology, Faculty of Physics and Applied
Computer Science, al. Mickiewicza 30, PL-30059 Kraków, Poland*

Abstract

We propose a new topological invariant of unlabeled trees of N nodes. The invariant is a set of $N \times 2$ matrices of integers, with $\sum_j k^{d_{i,j}}$ and v_i as the matrix elements, where $d_{i,j}$ are the elements of the distance matrix and v_i denotes i -th node's degree and $k \in \mathbb{N}$. To compare the invariant calculated for possibly different graphs, the matrix rows are ordered with respect to first column, and — if necessary — with respect to the second one. We use the new invariant to evaluate from below the number of topologically different unlabeled trees up to $N = 17$. The results slightly exceed the asymptotic evaluation of Otter.

Key words: computer modeling and simulation, trees and graphs

1 Introduction

Averaging over different graphs is basic in numerous applications of the graph theory [1,2]. For such tasks, knowledge of the number of topologically differ-

^{*} Corresponding author. Fax: +48 12 6340010.

Email address: malarz@agh.edu.pl (Krzysztof Malarz).

URL: <http://home.agh.edu.pl/malarz/> (Krzysztof Malarz).

ent graphs is of primary importance. Having two graphs, a typical question is: are they different? If the graphs are labeled, respective algorithms are of polynomial time. However, for unlabeled graphs the task should be to check all possible labellings, what makes the problem unfeasible [3]. An alternative solution is to find a quantity which is different for different graphs, and of the same value if the graphs are topologically equivalent. The latter means that there is a one-to-one transformation from one graph to another: each pair of nodes linked (not linked) in one graph is linked (not linked) in another graph. Such a quantity is a topological invariant. However, actually we can be never sure if the quantity proposed as the invariant has indeed the above discriminating property. While its different values certainly mean different graph structures, the same value does not allow to claim that the graphs are indeed topologically identical. In many cases, the proposed quantity appears to be degenerate, i.e. its value is the same for different graphs. All that remains true for unlabeled trees, which are graphs without cyclic paths and without loops.

In a series of papers, Schultz et al. proposed and evaluated some scalar quantities as candidates to be topological invariants for trees [4]. This work was motivated by a chemical application of the constructed quantities, which were found to increase monotonically with the melting temperature of alkanes. However, almost all proposed invariants were found to be degenerate. On the other hand, the last proposed invariant is a real number and not integer, and the comparison of its value must rely on the numerical accuracy.

Here we propose a new candidate as a topological invariant for unlabeled trees. Unlike the quantities discussed previously, this is a set of matrices and not a single number. The advantage is that the matrices are ordered in a simple way, and the ordering algorithm works in polynomial time. On the other hand, to

Table 1

The number of trees T evaluated basing on sorted $(\mathbf{b}, \mathbf{v})$ pairs with $k \leq 6$. T_O is given by the Otter's formula (1).

N	1	2	3	4	5
T	1	1	1	2	3
T_O	1.6	0.8	0.9	1.3	2.2
	6	7	8	9	10
	6	11	23	47	106
	4.0	8.1	17.2	37.9	86.1
	11	12	13	14	15
	235	551	1301	3159	7741
	200.5	476.9	1153.9	2833.8	7049.1
	16	17			
	19320	48629			
	17731.0	45038.0			

state that two trees are topologically identical we compare all the matrix elements. This modification is expected to enhance the discriminative force of the proposed invariant. We use the obtained criterion to calculate the number of topologically non-equivalent trees up to $N = 17$ nodes. As stated above, the obtained numbers can be treated only as an evaluation of the true results from below. Then, if one has a better criterion, he should find the greater number of trees for $N \leq 17$, than our result, given in Table 1.

In our next section, our numerical procedure is described in details. Section 3 contains the numerical results. The obtained numbers of trees are compared to the analytical evaluation of Otter [7]. In Section 4 we provide an argument that the range of values of any good candidate of a topological invariant should increase exponentially with the number of nodes N . Our proposition is the only one we know to fulfill this criterion. However, this ‘criterion of range’ is not sufficient in the sense that it does not exclude the possible degeneracy.

2 Numerical approach

Our numerical approach is based on the construction of the distance matrix $\mathbf{D}^N$ during tree growth [5]. In distance matrix $\mathbf{D}$ element $d_{i,j}$ gives the length of the shortest path between nodes i and j , i.e. the minimal number of edges which connect these vertices. The construction algorithm relies on the fact that a distance to a newly added $(N + 1)$ -th node to all other nodes $1 \leq i \leq N$ via node q — to which new node is attached — is $d_{N+1,i} = d_{q,i} + 1$. The computational complexity of the distance matrix $\mathbf{D}$ construction recipe is of order of $O(N^2)$. The number of ‘1’ in i -th row gives i -th node’s degree v_i .

For counting trees two single-column vectors seem to be useful: the first one $\mathbf{b}$ gives sum of the natural parameter $k \in \mathbb{N}$ to the power equal to distance $d_{i,j}$ of i -th node to another node j : $b_i = \sum_{j=1}^N k^{d_{i,j}}$. The second vector $\mathbf{v}$ serves node’s degrees v_i . These vectors form a matrix, which is sorted with key pair $(\mathbf{b}, \mathbf{v})$: two trees are different if their $(\mathbf{b}, \mathbf{v})$ are different for *all* values of k . Actually, we compare the matrices for $k = 2, 3, 4, 5$ and 6. We have checked numerically, that the results of trees counting are different for $k \leq 4$ and $k = 5$ but they are the same for $k = 5$ and $k = 6$. Sorting elements of $(\mathbf{b}, \mathbf{v})$ makes




Fig. 1. Two trees of $N = 4$ nodes. (Figures using Pajek [12].)

the matrix independent on an order of labeling of the tree's nodes.

For example, the only two existing trees for $N = 4$ — presented in Fig. 1 — have distance matrices $\mathbf{D}^4$ [6]:

$$\mathbf{D}_a^4 = \begin{pmatrix} 0 & 1 & 2 & 3 \\ 1 & 0 & 1 & 2 \\ 2 & 1 & 0 & 1 \\ 3 & 2 & 1 & 0 \end{pmatrix} \quad \text{and} \quad \mathbf{D}_b^4 = \begin{pmatrix} 0 & 1 & 2 & 2 \\ 1 & 0 & 1 & 1 \\ 2 & 1 & 0 & 2 \\ 2 & 1 & 2 & 0 \end{pmatrix}$$

and sorted pair $(\mathbf{b}, \mathbf{v})^4$ for $k = 2$:

$$(\mathbf{b}, \mathbf{v})_a^4 = \begin{pmatrix} 15 & 1 \\ 15 & 1 \\ 9 & 2 \\ 9 & 2 \end{pmatrix} \quad \text{and} \quad (\mathbf{b}, \mathbf{v})_b^4 = \begin{pmatrix} 11 & 1 \\ 11 & 1 \\ 11 & 1 \\ 7 & 3 \end{pmatrix}.$$

Now, the next generation of trees is produced $N \rightarrow N + 1$ by systematically adding a new node to each node for all preexisting trees. For example in case of $N = 4 \rightarrow N = 5$ look at Fig. 2. Among eight cases only three classes of

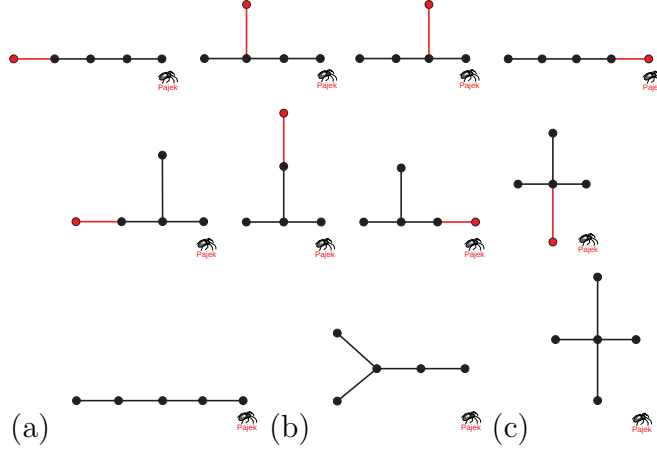


Fig. 2. Eight possible trees obtained by adding one node by one link in all possible ways to two trees with $N = 4$. Among them *only three* are different.

$(\mathbf{b}, \mathbf{v})^5$ exist, i.e.:

$$(\mathbf{b}, \mathbf{v})_a^5 = \begin{pmatrix} 31 & 1 \\ 31 & 1 \\ 17 & 2 \\ 17 & 2 \\ 13 & 2 \end{pmatrix}, (\mathbf{b}, \mathbf{v})_b^5 = \begin{pmatrix} 23 & 1 \\ 19 & 1 \\ 19 & 1 \\ 13 & 2 \\ 11 & 3 \end{pmatrix} \text{ and } (\mathbf{b}, \mathbf{v})_c^5 = \begin{pmatrix} 15 & 1 \\ 15 & 1 \\ 15 & 1 \\ 15 & 1 \\ 9 & 4 \end{pmatrix}$$

for $k = 2$. Three distance matrices $\mathbf{D}_{a,b,c}^5$ for these three trees are necessary to next step, i.e. $N = 5 \rightarrow N = 6$. The procedure is repeated recursively.

Technically, the sorting with key procedure is an implementation of the quick-sort algorithm [8] while comparing two $(\mathbf{b}, \mathbf{v})$ matrices are realized with standard C++ STL library [9].

3 Results of simulations

The number of trees T obtained with above algorithm with $k \leq 5$ are given in Table 1. The results agree with the available number of trees given in Refs. [2,10]. For example, all $T = 47$ trees of $N = 9$ nodes are presented in Fig. 3.

For large enough N the number of trees T is asymptotically given as

$$T_O(N) = \beta \cdot \alpha^N \cdot N^{-5/2}, \quad (1)$$

where $\alpha = 2.9557652856 \dots$ and $\beta = 0.5349496061 \dots$ [7]. The comparison of the results of the exact trees counting and predictions of Eq. (1) is shown in Table 1 and in Fig. 4.

In the terminology of Ref. [4] the degree vector $\mathbf{v}$ is called *valence* vector. The molecular topological index (MTI) is defined as¹

$$\text{MTI} = \|\mathbf{v} \cdot (\mathbf{A} + \mathbf{D})\|, \quad (2)$$

where $\mathbf{A}$ is a graph's adjacency matrix and vector norm $\|\dots\|$ is defined as sum of absolute value of vectors element

$$\|\mathbf{c}\| = \|(c_1, c_2, \dots, c_{N-1}, c_N)\| \equiv \sum_{i=1}^N |c_i|.$$

In adjacency matrix $\mathbf{A}$ element a_{ij} gives number of edges between nodes i and j . For simple graphs — where multiple edges are forbidden — matrix $\mathbf{A}$ becomes binary.

¹ MTI was originally defined as a simple sum of elements of product $\mathbf{v}(\mathbf{A} + \mathbf{D})$ and not as sum of absolute values of its elements. As elements of $\mathbf{v}(\mathbf{A} + \mathbf{D})$ are always positive our description is only more formally compact.

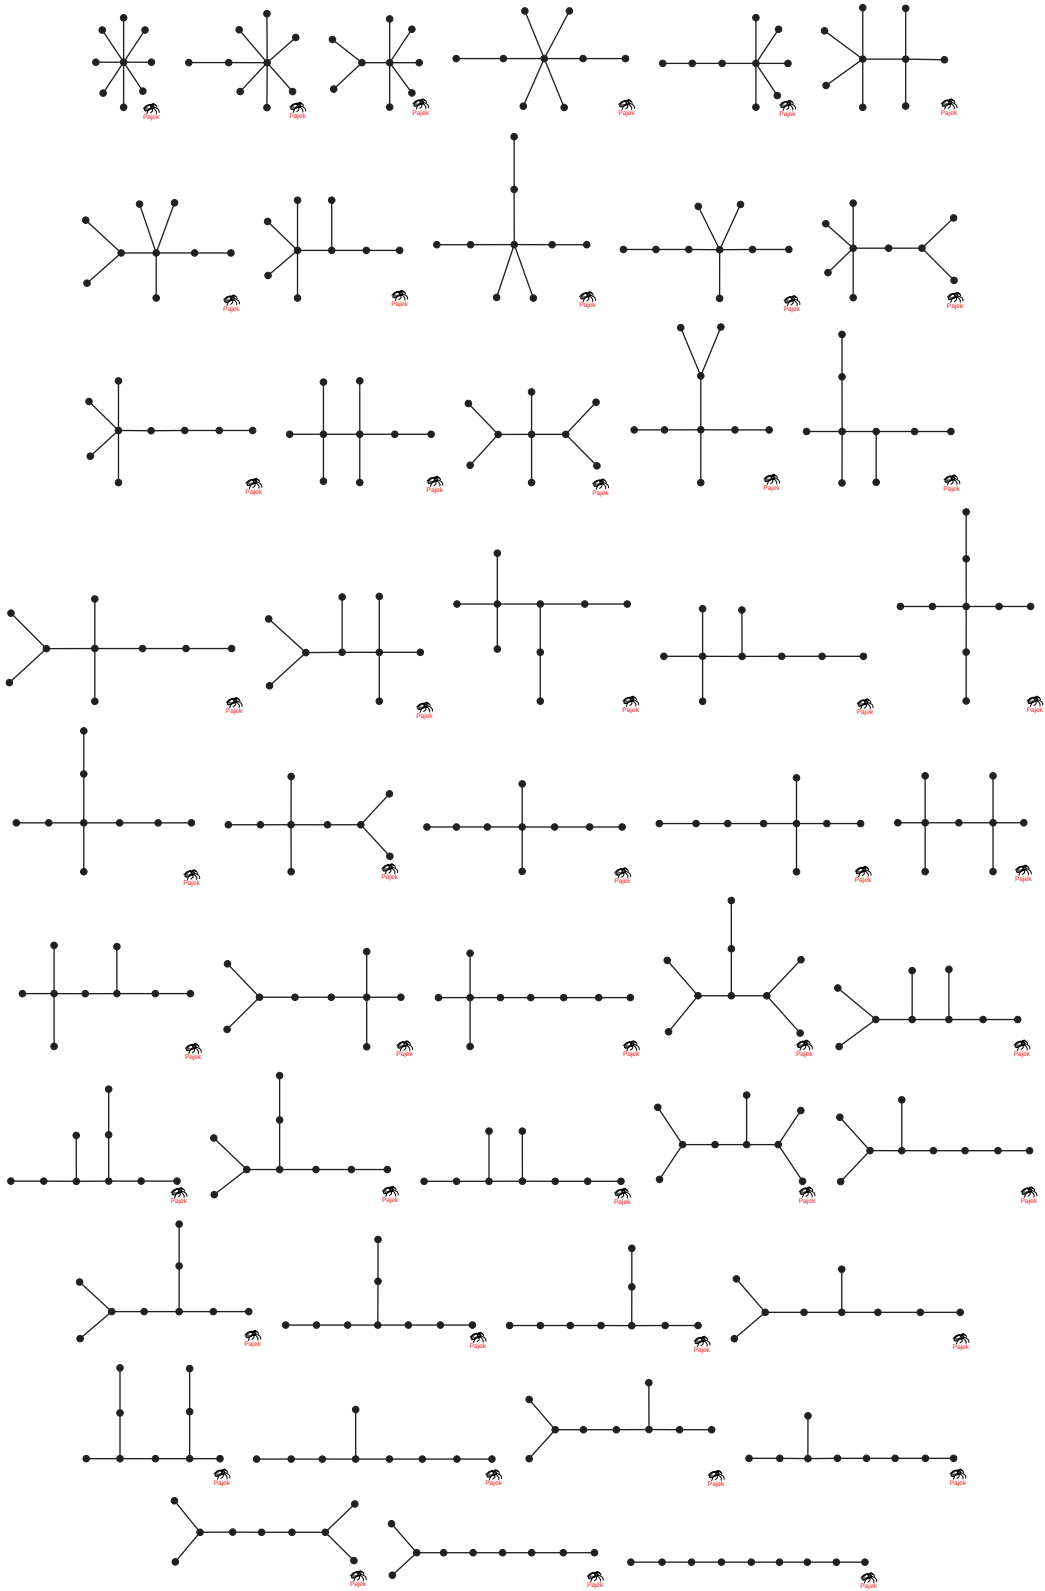


Fig. 3. All $T = 47$ trees with $N = 9$ nodes.

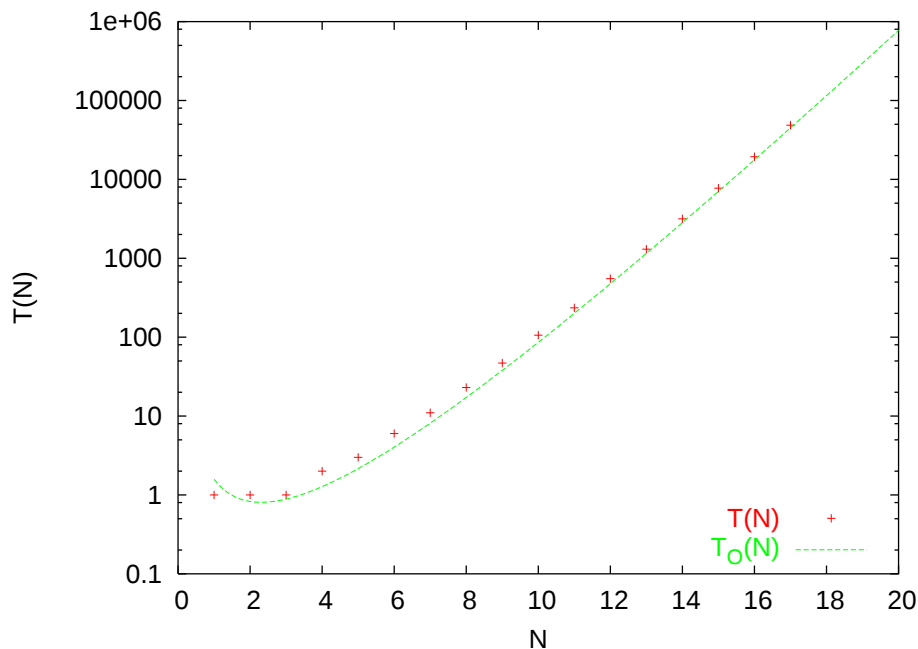


Fig. 4. Number of trees T as compared with the Otter's formula T_O .

MTI was believed to be single-number value which allow to differ between trees [4]. Here, however we can see that this method of counting fails for $N \geq 8$. The obtained number of trees with Schultz method is $T_S(8) = 20$ while true value is $T(8) = 23$. Three pairs of trees which have the same MTI but different $(\mathbf{b}, \mathbf{v})^8$ are shown in Fig. 5.

The purpose of introducing MTI was to differentiate chemical molecules. When a carbon atom (with proper number of hydrogen atoms) is assigned to all nodes of trees shown in Fig. 5(c)-(f) they may represent semi-structural formulas of (c) 2,2,4-trimethylpentane, (d) 3-ethyl-2-methylpentane, (e) 2,2-dimethylhexane and (f) 3-ethylhexane [11]. The MTI cannot differ between pairs (c,d) and (e,f) of these forms of C_8H_{18} .

Our results contain not only the number of trees, but the structure of all of them. Binary files with distance matrices and the program for their conversion to input files for Pajek [12] program are available from our web page [13].

MTI

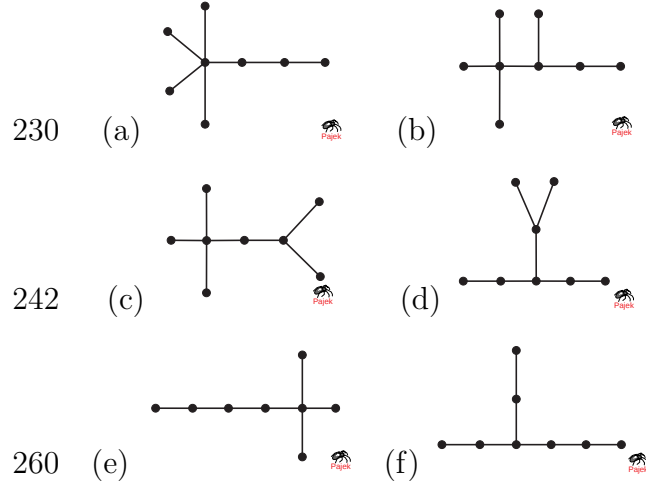


Fig. 5. Three pairs of different topologically trees with $N = 8$ nodes with the same MTI.

4 Discussion

Now we are going to prove that for large N , the range of any discriminative topological invariant with integer values should increase exponentially with N . To each tree, a different value of the invariant must be assigned, if the invariant is discriminative. Then we get an exponentially increasing number of different integer values. The length of a range on an axis, where these values can be placed, must increase also at least exponentially, what finishes the proof. We note that the matrix character of the invariant does not change this result, as long as the matrix size increases as N^c , where c is a constant. In our case $c = 1$, because the matrix is $N \times 2$. We should add that this ‘range criterion’ is crucial in the asymptotic regime of large N . Up to now, the computational resources do not allow to penetrate this region.

Concluding, we have proposed a new topological invariant to discriminate

unlabeled trees. The matrix character of the invariant allows to believe, that the discriminating power of the invariant is much better, than scalar invariants proposed previously.

Acknowledgements

K.M. thanks Aleksandra Jung for her valuable help. Calculations were carried out in ACK-CYFRONET-AGH. The machine time on SGI 2800 is financed by the Polish Ministry of Science and Information Technology under Grant No. KBN/SGI2800/AGH/018/2003.

References

- [1] J. Clark, D. A. Holton, *A First Look at Graph Theory*, (World Scientific, 1991);
M. E. J. Newman, SIAM Rev. **45** (2003) 167;
S. N. Dorogovtsev, J. F. F. Mendes, A. N. Samukhin, Nucl. Phys. **B653** (2003) 307;
R. Albert, A.-L. Barabási, Rev. Mod. Phys. **286** (2002) 47;
S. N. Dorogovtsev, J. F. F. Mendes, Adv. Phys. **51** (2002) 1079.
- [2] R. J. Wilson, *Introduction to Graph Theory*, (Addison–Wesley, 1996).
- [3] M. R. Garey, D. S. Johnson, *Computers and Intractability* (Freeman, New York, 1979).
- [4] H. P. Schultz, T. P. Schultz, J. Chem. Inf. Comput. Sci. **40** (2000) 107;
H. P. Schultz, E. B. Schultz, T. P. Schultz, *ibid* **35** (1995) 864; *ibid* **34** (1994) 1151;

- H. P. Schultz, T. P. Schultz, *ibid* **33** (1993) 240; *ibid* **31** (1991) 144;
- H. P. Schultz, E. B. Schultz, T. P. Schultz, *ibid* **30** (1990) 27;
- H. P. Schultz, *ibid* **29** (1989) 227.
- [5] K. Malarz, J. Czaplicki, B. Kawecka-Magiera, K. Kułakowski, *Int. J. Mod. Phys. C* **14** (2003) 1201;
- K. Malarz, J. Karpińska, A. Kardas, K. Kułakowski, *TASK Quarterly* **8** (2004) 115;
- K. Malarz, K. Kułakowski, *Eur. Phys. J.* **B41** (2004) 333;
- K. Malarz, K. Kułakowski, *cond-mat/0501545*.
- [6] K. Malarz, K. Kułakowski, *Physica* **A345** (2005) 326.
- [7] R. Otter, *Ann. Math.* **49** (1948) 583.
- [8] R. Johnsonbaugh, M. Schaefer, *Algorithms* (Pearson, 2004);
- D. E. Knuth, *The Art of Computer Programming, Vol. 3: Sorting and Searching* (Addison–Wesely, 1998).
- [9] A. A. Stepanov, M. Lee, *The Standard Template Library*, (Hewlett–Packard Laboratories, 1994);
- N. M. Jousuttis, *The C++ Standard Library: A Tutorial and References* (Addison–Wesley–Longman, 1999).
- [10] <http://www.research.att.com/cgi-bin/access.cgi/as/njas/sequences/eisA.cgi?Anum=A000055>
- [11] R. T. Morrison, R. N. Boyd, *Organic Chemistry*, (Allyn and Bacon, 1973).
- [12] W. de Nooy, A. Mrvar, V. Batagelj, *Exploratory Social Network Analysis with Pajek*, (Cambridge UP, 2005);

P. Doreian, V. Batagelj, A. Ferligoj, *Generalized Blockmodeling*, (Cambridge UP, 2005);

<http://vlado.fmf.uni-lj.si/pub/networks/pajek/>.

[13] <http://www.zis.agh.edu.pl/trees/>.